

JKS[®]

INSTALLATION INSTRUCTIONS

Product: Sway Bar Lanyard kit

Part Number: JKS2039

Applications: Wrangler JK, 2007-2015

517-278-1226 • tech-jks@ridefox.com • www.jksmfg.com
491 W. Garfield Avenue, Coldwater, MI 49036


Welcome

CONGRATULATIONS on purchasing the sway bar lanyards from JKS Manufacturing. We are committed to providing you with the best products available and your satisfaction is our first priority.

Tools Required

- 5/16" Drill
- 7/16" socket and wrench

Parts

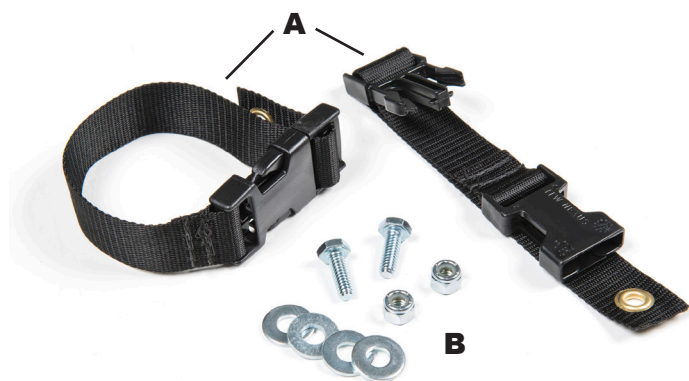

	Description	QTY
A	Lanyard	2
B	Bolt Pack 768	
	2 - 1/4"-20 x 3/4" bolt	2
	2 - 1/4"-20 nylock nut	2
	2 - 1/4" USS washer	4

Important

NOT COMPATIBLE WITH aftermarket swaybars.
Install product with Original Equipment swaybar only.


NEVER DISCONNECT swaybar when operating vehicle on public roads.

WHEN DISCONNECTED, the Quicker Disconnects must be completely removed from vehicle, and the swaybar must be secured to the chassis in the horizontal position to prevent interference with tires.

Installation

□ 1. LANYARD INSTALLATION

- Disconnect the sway bar links and rotate the sway bar until it is horizontal.
- Attach the lanyard to the end of the sway bar and use the lanyard to locate the mounting hole position on the side of the coil bucket.
- Make a mark and drill a 5/16" hole through the coil bucket.

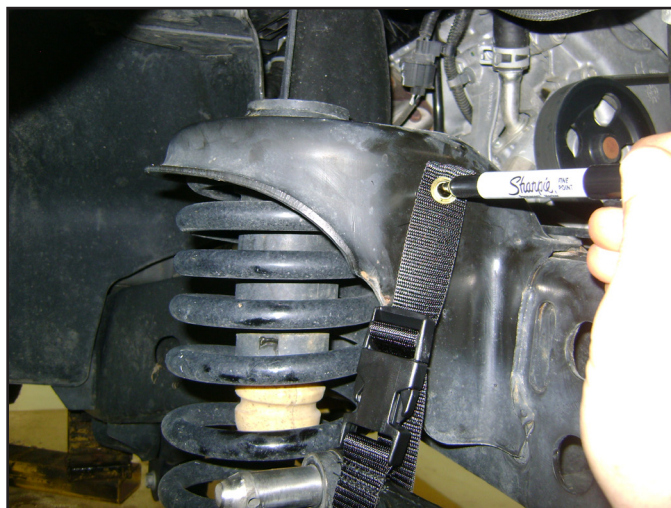

- Attach the lanyards to the drilled hole using the supplied 1/4" hardware.

□ 2. CORRECT OPERATION OF QUICKER DISCONNECTS WITH LANYARDS

- Remove the Click Pins from the Upper and Lower Mounting Posts.
- Completely remove Quicker Disconnects from vehicle and store safely inside vehicle. **HINT: To avoid losing Click Pins, reinstall them on mounting posts while Quicker Disconnects are removed.**
- Connect the lanyards to the end of the sway bar to secure it in the in the horizontal position.

IMPORTANT: When disconnected, the swaybar must be secured in the horizontal position to prevent interference with the tires. Failure to secure the swaybar correctly can lead to severe tire damage.

- To reconnect, disconnect the lanyards, remove click pins from mounting posts, and the rotate swaybar down.
- Slide Quicker Disconnects back onto the mounting posts and reinstall Click Pins. **HINT: Install passenger side Quicker Disconnect first for easist reinstallation.**

If you encounter any problems with your installation and setup, please contact JKS Manufacturing for technical assistance.

JKS Technical Support	
Phone	517-278-1226
E-Mail	tech-jks@ridefox.com

Troubleshooting

If swaybar does not rotate freely, remove from vehicle, clean and apply rubber lubricant to chassis-mounted bushings, and reinstall.

©2014 JKS Manufacturing, Inc & Aftermarketing, LLC
Revision Date 11/21//2014